



Activating Equipment Energizers on your Safety Spot


- 1) Follow this tutorial if you have a Generation 6 Energizer with Wi-Fi and Ethernet.
- 2) Log into your Safety Spot by going to <https://yoursite.safetyspot.com> where “yoursite” is the name of your organization.
- 3) Choose the Menu icon on the top left corner of the homepage

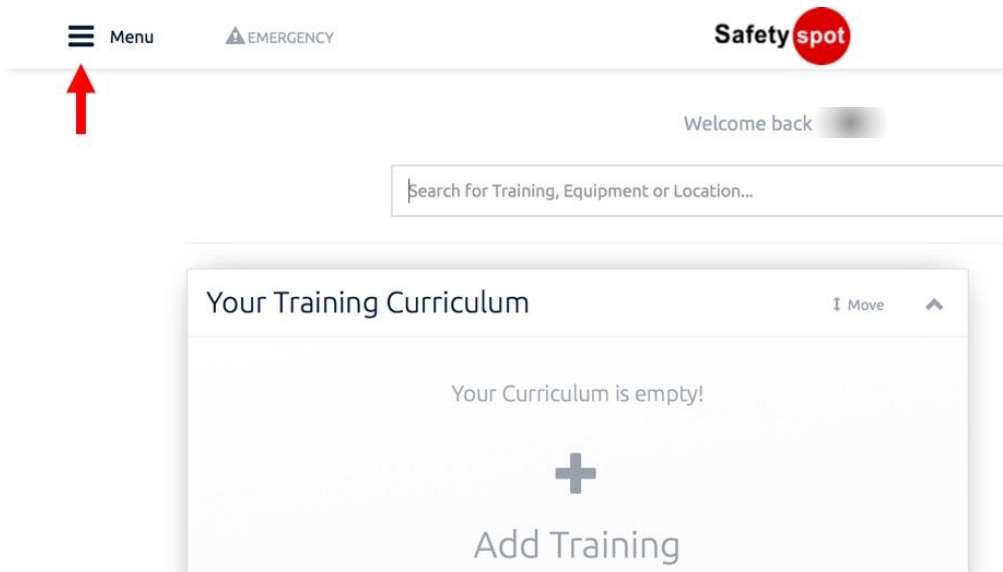


- 4) In the dropdown Menu, select “Device Management.”

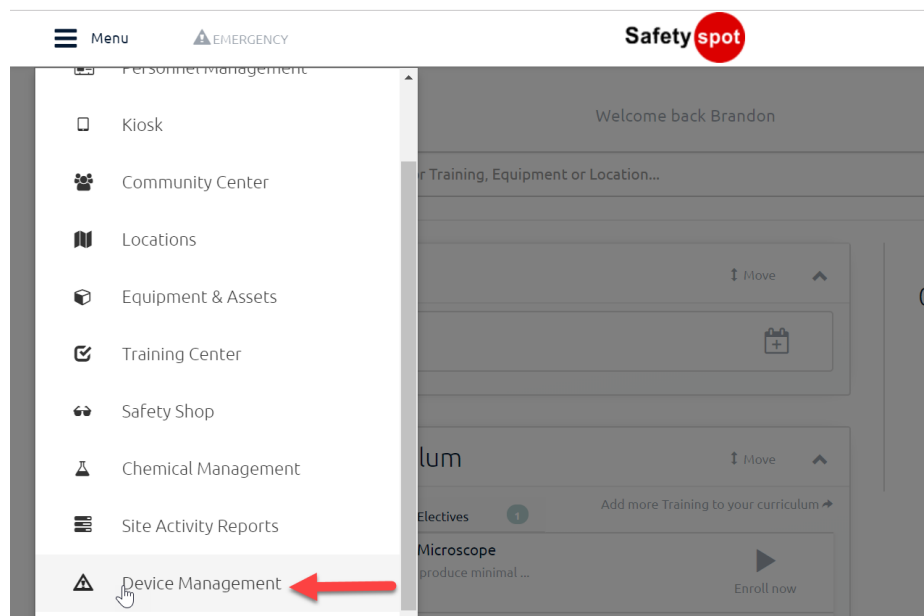


5) Choose “+ New Energizer” to add your site.

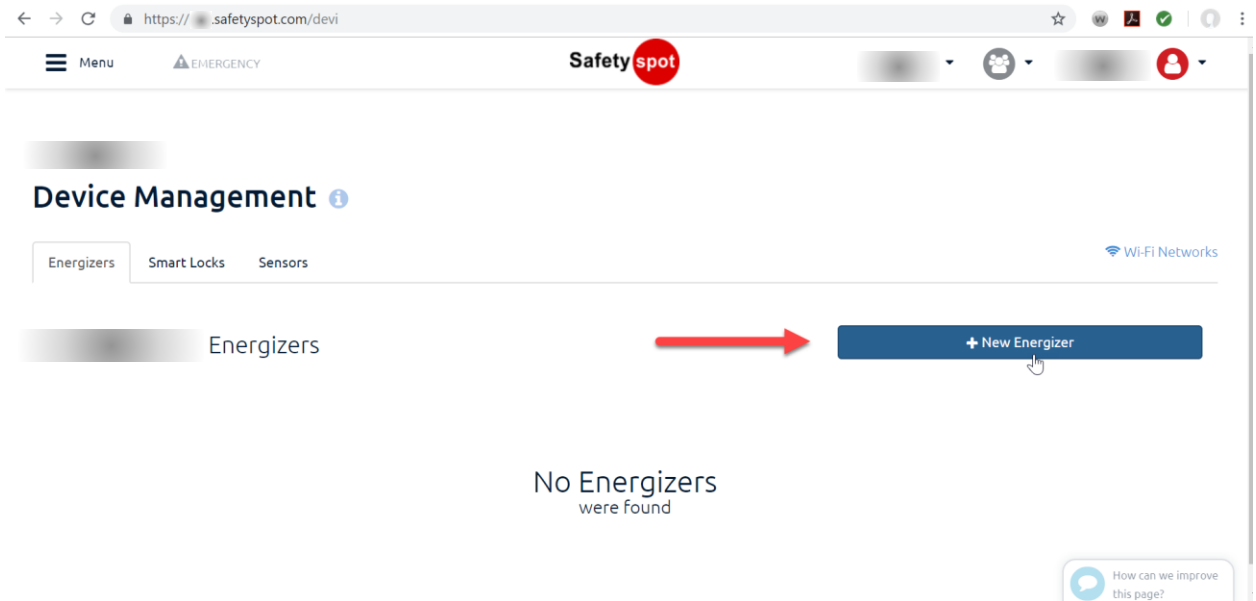

6) Search & select an Equipment Item to link to your new Equipment Energizer:

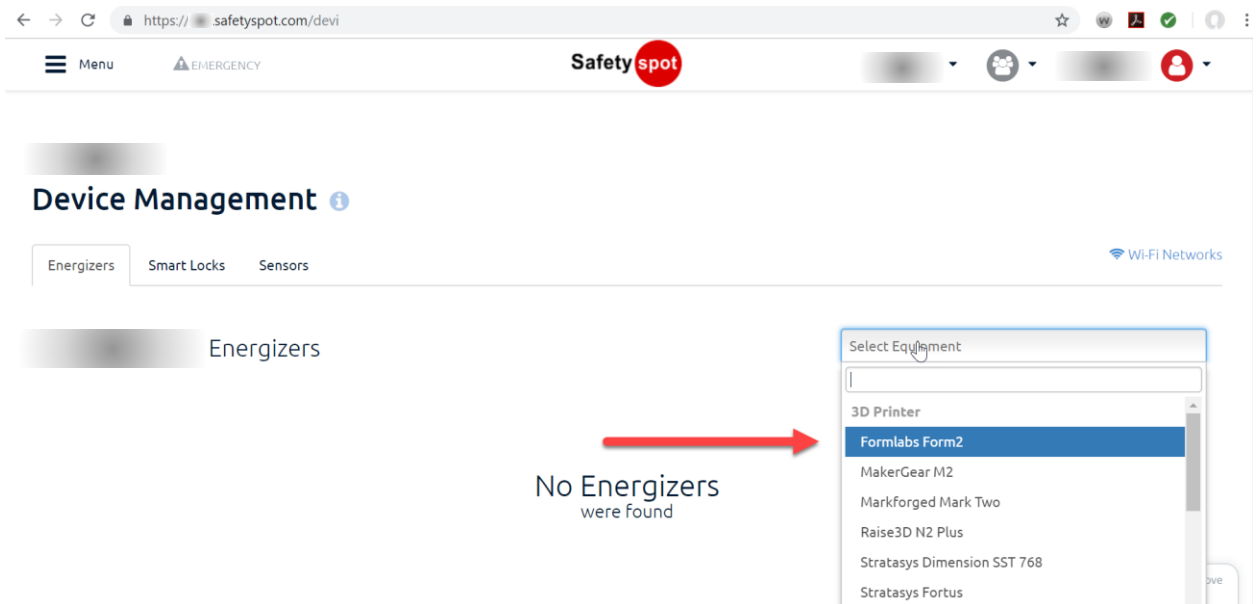


- 7) Enter in the required information specific to your new Equipment Energizer and Equipment. If you have not yet added your Wi-Fi network to Safety Spot, make sure to do this before creating your Energizer (see “How to Add a Wi-Fi Network”).

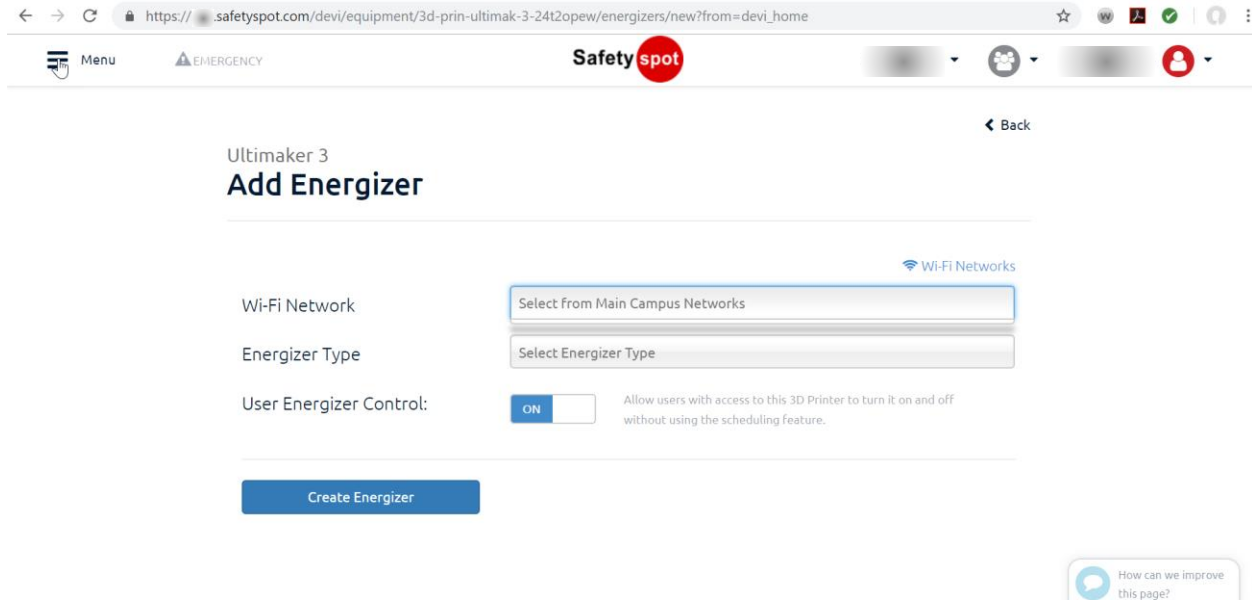

How to Add a Wi-Fi Network

If you haven't added your Wi-Fi yet, click the “Wi-Fi Networks” link, and this screen will display. Enter your network name and password to continue. If you have issues with Wi-Fi (based upon how your IT Department configured it) then contact help@safetyspot.com and we'll get you a hard-wired (ethernet) energizer to help you out.

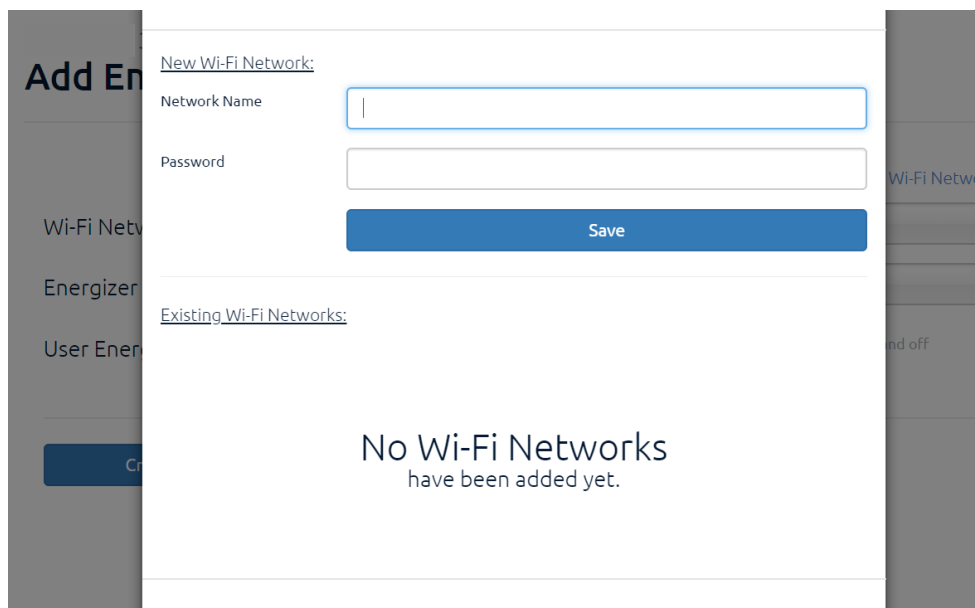

- 8) After you've added your network, select the Energizer type (20 amp, 110-120Vac standard), and make sure "User Energizer Control" is turned ON. Then click "Create Energizer."

Menu EMERGENCY Safety spot

Ultimaker 3 Extended
Add Energizer

Wi-Fi Network SafetySpotDemo

Energizer Type 120 Vac, 20 A

User Energizer Control: ON Allow users with access to this 3D Printer to turn it on and off without using the scheduling feature.

Create Energizer

How can we improve this page?

- 9) Great work! Now your Safety Spot knows to look out for a new equipment energizer. After you clicked "Create Energizer," you'll see a wizard screen that walks you through how to add the physical Equipment Energizer to your digital Safety Spot.

Make sure your Equipment Energizer is plugged into 110/120 Vac power before proceeding. We recommend the Energizer is disconnected from equipment for this initial configuration step.

- 10) Now switch your laptop's Wi-Fi connection to the Equipment Energizer's broadcasted Wi-Fi network called "SafetySpot" (this only has to be done on initial config). Follow Steps 1 thru 4 on the Wizard.

Menu EMERGENCY Safety spot

Hardware Set Up
Initialize your Device

Follow the steps below to connect your hardware device to the SafetySpotDemo Network.

- 1 Please switch your Wi-Fi connection to the SafetySpot network
- 2 Click this button after connecting to the network
- 3 Reconnect back to your own network
- 4 When you are back online, click this button!


How can we improve this page?

11) You're done! Congratulations on successfully adding an Equipment Energizer!



If you have any questions email us at help@safetyspot.com (this is best way to reach our team). You can also call us M-F at +01 (213) 279-2772

Appendix: Energizer Status Lights

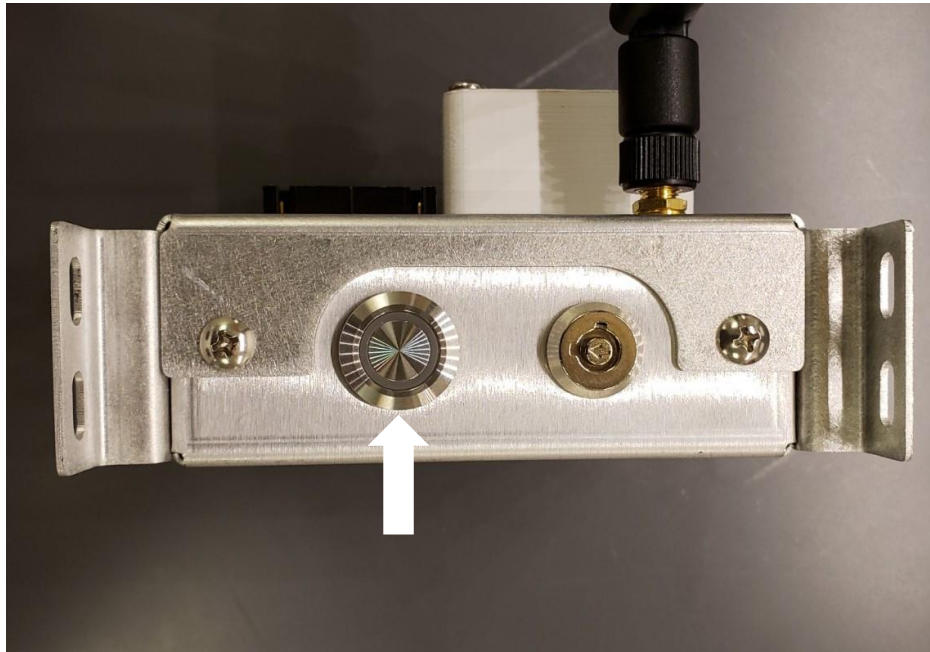

JOB DONE Button with Status Light indicator

<u>Status Light Color</u>	<u>Description</u>
Red	Not connected to Wi-Fi (initializing or ready to be initialized)
Blue	Standby (Connected and ready to be used)
Green	Energized (Equipment is live)
White	Manually Bypassed (through key-switch)
Rapidly Changing Colors	Alert to be turned off through JOB DONE Button

The JOB DONE button is used to turn off the energizer. It can also be used to reset the energizer settings (forget equipment and Wi-Fi credentials) by holding it for 8 seconds.